
phs memory®

48GB (3x16GB) Kit Computer memory DDR3 for HP ProLiant DL160se Gen6 (G6) RDIMM




PHS-memory® - computer memory with 100% quality

- many years of IT competence
- Free support for optimal configuration and product selection
- High availability through professional warehouse management
- Fast delivery in throughout Europe
- Short response times and professional order processing due to full digitalization throughout the entire process with complete traceability
- Incoming goods inspection include checks of the DRAMs, PCBs and the programmed SPDs in order to exclude possible errors (Controlled BOM).
- PHS-memory® brand memories guarantee 100% compatibility to the specified system.
- PHS-memory® memories can be used together with existing memories in the device depends on to the configuration rules of the system.
- The "fallback option" in the SPD of PHS-memory® allows DRAMs with higher clock rates to be operated together with older memory modules with lower clock rates within the system.
- Products with unique serial number for service and warranty
- Pre-sales and after-sales support by technically trained personnel

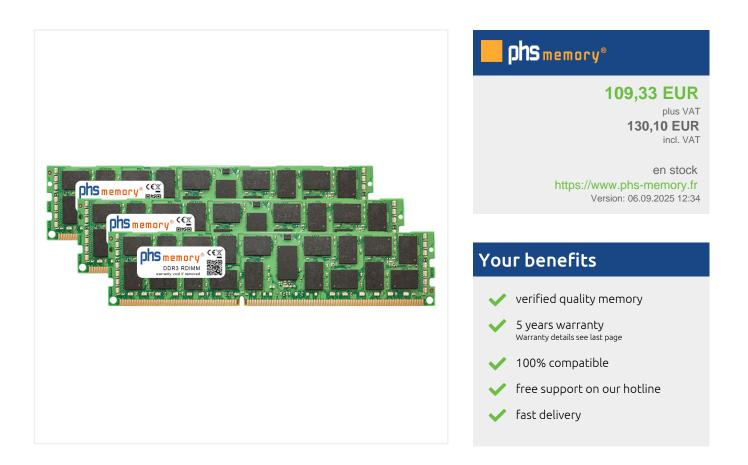

Memory Specification

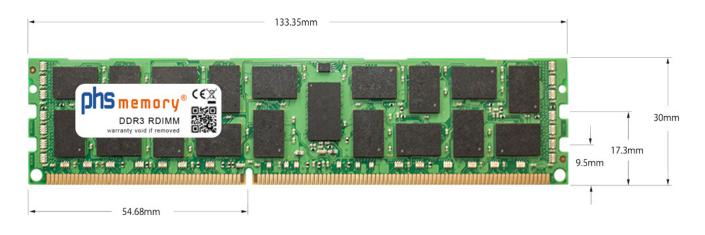

Memory technologyDDR3ECC supportyesJEDEC NormPC3-10600RDRAM Organization1Gx4Rank2Rx4TypeRDIMM (ECC Registered)Number of pins240 Pin DIMMMemory data transfer rate1333MHz @ CL9Speciality-, DDPBoard dimensions133,35 x 30 (LxB mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantSP170962	Memory size	16GB		
JEDEC NormPC3-10600RDRAM Organization1Gx4Rank2Rx4TypeRDIMM (ECC Registered)Number of pins240 Pin DIMMMemory data transfer rate1333MHz @ CL9Speciality-, DDPBoard dimensions133,35 x 30 (LxB mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantyes	Memory technology	DDR3		
DRAM Organization1Gx 4Rank2Rx4TypeRDIMM (ECC Registered)Number of pins240 Pin DIMMMemory data transfer rate1333MHz @ CL9Speciality-, DDPBoard dimensions133,35 x 30 (LxB mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantyes	ECC support	yes		
Rank2Rx4TypeRDIMM (ECC Registered)Number of pins240 Pin DIMMMemory data transfer rate1333MHz @ CL9Speciality-, DDPBoard dimensions133,35 x 30 (LxB mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantyes	JEDEC Norm	PC3-10600R		
TypeRDIMM (ECC Registered)Number of pins240 Pin DIMMMemory data transfer rate1333MHz @ CL9Speciality-, DDPBoard dimensions133,35 x 30 (LxB mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantyes	DRAM Organization	1Gx4		
Number of pins240 Pin DIMMMemory data transfer rate1333MHz @ CL9Speciality-, DDPBoard dimensions133,35 x 30 (LxB mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantyes	Rank	2Rx4		
Memory data transfer rate1333MHz @ CL9Speciality-, DDPBoard dimensions133,35 x 30 (LxB mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantyes	Туре	RDIMM (ECC Registered)		
Speciality-, DDPBoard dimensions133,35 x 30 (LxB mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantyes	Number of pins	240 Pin DIMM		
Board dimensions133,35 x 30 (LxB mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantyes	Memory data transfer rate	1333MHz @ CL9		
Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantyes	Speciality	-, DDP		
Storage temperature-40° C - +95° CRoHS compliantyes	Board dimensions	133,35 x 30 (LxB mm)		
RoHS compliant yes	Operating temperature	0° C - 85° C		
	Storage temperature	-40° C - +95° C		
SKII SP170962	RoHS compliant	yes		
51110502	SKU	SP170962		
EAN 4055069408164	EAN	4055069408164		

overRAMing maximize your RAM



Most systems - including the HP ProLiant DL160se Gen6 (G6) - can be upgraded with more memory than originally specified by the device manufacturer.

Therefore, our memory specialists continuously analyze new memory solutions in selected systems. Due to improved manufacturing technologies, new memories with higher performance and capacity will be tested for stability and functionality.

Then the new memory solutions are released for the respective systems. Use the benefits of larger computer memory capacity with the PHSmemory® overRAMing memory solutions.

https://www.phs-memory.fr/-BOR

Note: The module specified in this datasheet is one of several possible configurations available under this part number.

Some details may differ from the specifications described here and the illustration, but have no negative influence on the functionality.



System Specifications

The memory is 100% compatible with this sytem:

System manufacturer	HP
Device type	Server
Device family	ProLiant
Device series	DL160 Serie
Device name	ProLiant DL160se Gen6 (G6)
Maximum memory*	288GB / 192GB according to manufacturer
Number of memory sockets	18
Annotation	Don´t mix ECC UDIMM and RDIMM server memory in one system. Both technologies can be used and extended without any problems alone.

* The specifications for the maximum memory upgrade may differ from those of the manufacturer HP. Often the information given in the manual for the maximum memory upgrade is not up to date. New memory technologies, bios updates or newer software versions often allow the use of memory modules with a higher capacity than specified by the manufacturer with the same performance and stability.

Memory modules with our overRAMing-symbol are approved by us for maximum memory expansion.

Information on memory allocation

Bestückung der Computer memory ProLiant DL160se G6

To achieve good system performance, it is recommended to distribute the memory evenly among the memory slots and evenly among the CPUs.

Durch neue memorytechnologien ist es möglich die 16GB RDIMM Computer memory with 2Rank anstatt 4Rank aufzubauen. Dadurch ist es möglich anstatt der 12 x 16GB RDIMM memory im ProLiant DL160se G6 288GB Computer memory with 18 x 16GB RDIMM einzusetzen.

Information on memory installation

- Turn off the system
- Remove the plug of the power supply unit (if connected)
- Remove the battery, according to the user manual of the system
- Always ground yourself before touching electronic components
- Protect the memory module from static voltages:
- Do not touch the gold pins of the memory module
- Only touch the sides of the memory module
- Use a grounding strap and/or ESD glove if possible

General installation instructions are supplied by E-Mail.



Further memory options for HP ProLiant DL160se Gen6 (G6)

Size	SKU	Technology	Туре	Number of pins	Brand	Reference no.
4GB	SP170960	DDR3	UDIMM ECC (ECC unbuffered)	240 Pin DIMM	PHS-memory®	500672-B21
8GB	SP464534	DDR3	UDIMM ECC (ECC unbuffered)	240 Pin DIMM	PHS-memory®	
8GB	SP170958	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	500662-B21
16GB	SP170961	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	
8GB	SP170959	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	500662-24G
16GB	SP170962	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	

PHS-memory® warranty

Every PHS-memory® is equipped with a 5-years-warranty of perfect operation. If the RAM module is defective or fails within 5 years of purchase when used properly, you will receive an appropriate RAM module free of charge. If a suitable memory module is no longer available, we will refund the purchase price.

For more information on warranty and service please visit https://www.phs-memory.fr/-W5Y



Contact Information

PHS-electronic gmbh - www.phs-memory.fr -Karl-Götz-Str. 5 97424 Schweinfurt Allemagne Phone: +49 9721 784678 E-Mail: info@phs-memory.fr Web: www.phs-memory.fr

All information without guarantee. Technical changes and errors excepted. You can find current price information in our online shop at https://www.phs-memory.fr