
phs memory®

32GB Computer memory DDR5 for Supermicro GPU SuperServer SYS-521GU-TNXR RDIMM



PHS-memory® - computer memory with 100% quality

- many years of IT competence
- Free support for optimal configuration and product selection
- High availability through professional warehouse management
- Fast delivery in throughout Europe
- Short response times and professional order processing due to full digitalization throughout the entire process with complete traceability
- Incoming goods inspection include checks of the DRAMs, PCBs and the programmed SPDs in order to exclude possible errors (Controlled BOM).
- PHS-memory® brand memories guarantee 100% compatibility to the specified system.
- PHS-memory® memories can be used together with existing memories in the device depends on to the configuration rules of the system.
- The "fallback option" in the SPD of PHS-memory® allows DRAMs with higher clock rates to be operated together with older memory modules with lower clock rates within the system.
- Products with unique serial number for service and warranty
- Pre-sales and after-sales support by technically trained personnel

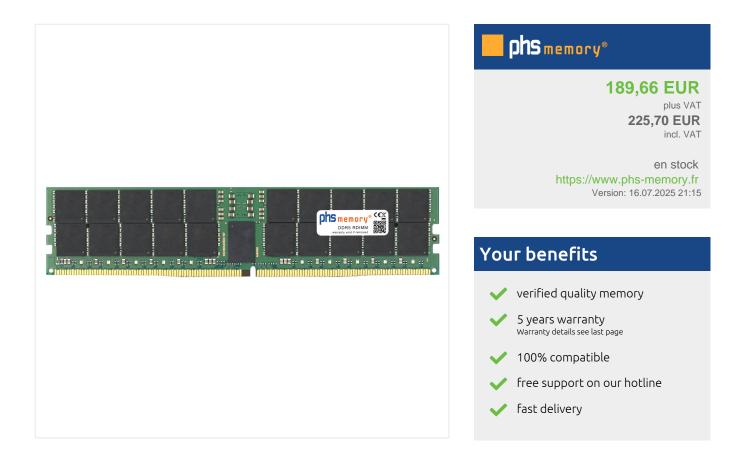

Memory Specification



Memory technologyDDR5ECC supportyesJEDEC NormPC5-38400-RDRAM Organization2Gx8Rank2Rx8TypeRDIMM (ECC Registered)Number of pins288 Pin DIMMMemory data transfer rate4800MHzVoltage1,1 VoltSpeciality-Operating temperature0° C - 85° CStorage temperature-40° C - +95° C	Memory size	32GB		
JEDEC NormPC5-38400-RDRAM Organization2Gx8Rank2Rx8TypeRDIMM (ECC Registered)Number of pins288 Pin DIMMMemory data transfer rate4800MHzVoltage1,1 VoltSpeciality-Operating temperature0° C - 85° C	Memory technology	DDR5		
DRAM Organization2Gx8Rank2Rx8TypeRDIMM (ECC Registered)Number of pins288 Pin DIMMMemory data transfer rate4800MHzVoltage1,1 VoltSpeciality-Operating temperature0° C - 85° C	ECC support	yes		
Rank2Rx8TypeRDIMM (ECC Registered)Number of pins288 Pin DIMMMemory data transfer rate4800MHzVoltage1,1 VoltSpeciality-Operating temperature0° C - 85° C	JEDEC Norm	PC5-38400-R		
TypeRDIMM (ECC Registered)Number of pins288 Pin DIMMMemory data transfer rate4800MHzVoltage1,1 VoltSpeciality-Operating temperature0° C - 85° C	DRAM Organization	2Gx8		
Number of pins288 Pin DIMMMemory data transfer rate4800MHzVoltage1,1 VoltSpeciality-Operating temperature0° C - 85° C	Rank	2Rx8		
Memory data transfer rate4800MHzVoltage1,1 VoltSpeciality-Operating temperature0° C - 85° C	Туре	RDIMM (ECC Registered)		
Voltage1,1 VoltSpeciality-Operating temperature0° C - 85° C	Number of pins	288 Pin DIMM		
Speciality - Operating temperature 0° C - 85° C	Memory data transfer rate	4800MHz		
Operating temperature 0° C - 85° C	Voltage	1,1 Volt		
	Speciality	-		
Storage temperature -40° C - +95° C	Operating temperature	0° C - 85° C		
	Storage temperature	-40° C - +95° C		
RoHS compliant yes	RoHS compliant	yes		
SKU SP477053	SKU	SP477053		
EAN 4067488405617	EAN	4067488405617		

Note: The module specified in this datasheet is one of several possible configurations available under this part number.

Some details may differ from the specifications described here and the illustration, but have no negative influence on the functionality.



System Specifications

The memory is 100% compatible with this sytem:

System manufacturer	Supermicro
Device type	Server
Device family	GPU SuperServer
Device series	SYS-520 Serie
Device name	GPU SuperServer SYS-521GU-TNXR
Maximum memory*	8TB
Number of memory sockets	32

* The specifications for the maximum memory upgrade may differ from those of the manufacturer Supermicro. Often the information given in the manual for the maximum memory upgrade is not up to date. New memory technologies, bios updates or newer software versions often allow the use of memory modules with a higher capacity than specified by the manufacturer with the same performance and stability.

Information on memory installation

- Turn off the system
- Remove the plug of the power supply unit (if connected)
- Remove the battery, according to the user manual of the system
- Always ground yourself before touching electronic components
- Protect the memory module from static voltages:
- Do not touch the gold pins of the memory module
- Only touch the sides of the memory module
- Use a grounding strap and/or ESD glove if possible

General installation instructions are supplied by E-Mail.

phs memory®

Further memory options for Supermicro GPU SuperServer SYS-521GU-TNXR

Size	SKU	Technology	Туре	Number of pins	Brand	Reference no.
16GB	SP477052	DDR5	RDIMM (ECC Registered)	288 Pin DIMM	PHS-memory®	MEM-DR516MB- ER48
24GB	SP488759	DDR5	RDIMM (ECC Registered)	288 Pin DIMM	PHS-memory®	
32GB	SP477054	DDR5	RDIMM (ECC Registered)	288 Pin DIMM	PHS-memory®	MEM-DR532MA- ER48
32GB	SP477053	DDR5	RDIMM (ECC Registered)	288 Pin DIMM	PHS-memory®	MEM-DR532MD- ER48
48GB	SP488760	DDR5	RDIMM (ECC Registered)	288 Pin DIMM	PHS-memory®	
64GB	SP477055	DDR5	RDIMM (ECC Registered)	288 Pin DIMM	PHS-memory®	MEM-DR564MC- ER48
96GB	SP488761	DDR5	RDIMM (ECC Registered)	288 Pin DIMM	PHS-memory®	
128GB	SP477056	DDR5	RDIMM (ECC Registered) 3DS	288 Pin DIMM	PHS-memory®	MEM-DR512MH- ER48
256GB	SP477057	DDR5	RDIMM (ECC Registered) 3DS	288 Pin DIMM	PHS-memory®	

PHS-memory® warranty

Every PHS-memory® is equipped with a 5-years-warranty of perfect operation. If the RAM module is defective or fails within 5 years of purchase when used properly, you will receive an appropriate RAM module free of charge. If a suitable memory module is no longer available, we will refund the purchase price.

For more information on warranty and service please visit https://www.phs-memory.fr/-W5Y



Contact Information

PHS-electronic gmbh - www.phs-memory.fr -Karl-Götz-Str. 5 97424 Schweinfurt Allemagne Phone: +49 9721 784678 E-Mail: info@phs-memory.fr Web: www.phs-memory.fr



All information without guarantee. Technical changes and errors excepted. You can find current price information in our online shop at https://www.phs-memory.fr