

128GB Computer memory DDR4 for Cisco UCS C460 M4 Xeon E7-x800 V4 RDIMM 3DS






Your benefits ✓ verified quality memory ✓ 5 years warranty Warranty details see last page ✓ 100% compatible ✓ free support on our hotline ✓ fast delivery

PHS-memory® - computer memory with 100% quality

- many years of IT competence
- Free support for optimal configuration and product selection
- High availability through professional warehouse management
- Fast delivery in throughout Europe
- Short response times and professional order processing due to full digitalization throughout the entire process with complete traceability
- Incoming goods inspection include checks of the DRAMs, PCBs and the programmed SPDs in order to exclude possible errors (Controlled BOM).
- PHS-memory® brand memories guarantee 100% compatibility to the specified system.
- PHS-memory® memories can be used together with existing memories in the device depends on to the configuration rules of the system.
- The "fallback option" in the SPD of PHS-memory® allows DRAMs with higher clock rates to be operated together with older memory modules with lower clock rates within the system.
- Products with unique serial number for service and warranty
- Pre-sales and after-sales support by technically trained personnel



Memory Specification

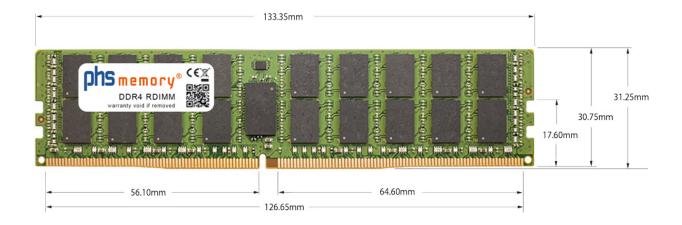

Memory size	128GB
Memory technology	DDR4
ECC support	yes
JEDEC Norm	PC4-23400-R
DRAM Organization	3DS 2H 8Gx4
Rank	4Rx4 (2S2Rx4)
Туре	RDIMM (ECC Registered) 3DS
Number of pins	288 Pin DIMM
Memory data transfer rate	2933MHz @ CL21
Voltage	1,2 Volt
Speciality	3DS
Board dimensions	133,35 x 31,25 (LxB mm)
Operating temperature	0° C - 85° C
Storage temperature	-40° C - +95° C
RoHS compliant	yes
SKU	SP465914
EAN	4067488294297

overRAMing - maximize your RAM



Most systems - including the Cisco UCS C460 M4 Xeon E7-x800 V4 - can be upgraded with more memory than originally specified by the device manufacturer.

Therefore, our memory specialists continuously analyze new memory solutions in selected systems. Due to improved manufacturing technologies, new memories with higher performance and capacity will be tested for stability and functionality.

Then the new memory solutions are released for the respective systems. Use the benefits of larger computer memory capacity with the PHSmemory® overRAMing memory solutions.

https://www.phs-memory.fr/-BOR

Note: The module specified in this datasheet is one of several possible configurations available under this part number.

Some details may differ from the specifications described here and the illustration, but have no negative influence on the functionality.



System Specifications

The memory is 100% compatible with this sytem:

System manufacturer	Cisco
Device type	Server
Device family	UCS
Device series	C400 Serie
Device name	UCS C460 M4 Xeon E7-x800 V4
Maximum memory*	12TB / 6TB according to manufacturer
Number of memory sockets	96

^{*}The specifications for the maximum memory upgrade may differ from those of the manufacturer Cisco. Often the information given in the manual for the maximum memory upgrade is not up to date. New memory technologies, bios updates or newer software versions often allow the use of memory modules with a higher capacity than specified by the manufacturer with the same performance and stability.

Memory modules with our overRAMing-symbol are approved by us for maximum memory expansion.

Information on memory allocation

Information on memory configuration

The following technical specifications should be considered in advance:

- In the device, you can install RDIMM (Registered DIMM) or LRDIMM (Load Reduced DIMM) RAM memory modules. LRDIMM memory is recommended when aiming for large memory capacities.
- RDIMM memory modules cannot be used together with LRDIMM memories.
- If a memory expansion is to be used with existing RAM memories, it must be checked which memory technology (RDIMM / LRDIMM) is already installed in the device.
- When using a multiprocessor system, the memory slots should always be configured identically for each CPU.
- Memory slots without a processor may not be used.
- A higher memory clock of the memory module automatically adapts to the memory clock specified by the system. This can be the case especially with larger capacities.

Information on memory installation

- Turn off the system
- Remove the plug of the power supply unit (if connected)
- Remove the battery, according to the user manual of the system
- Always ground yourself before touching electronic components
- Protect the memory module from static voltages:
 - Do not touch the gold pins of the memory module $% \left(1\right) =\left(1\right) \left(1\right) \left($
 - Only touch the sides of the memory module
 - Use a grounding strap and/or ESD glove if possible

General installation instructions are supplied by E-Mail.



Further memory options for Cisco UCS C460 M4 Xeon E7-x800 V4

8GB SP232097 DDR4 RDIMM (ECC Registered) 288 Pin DIMM PHS-memory® UCS-MR-1X081RU-6 UCS-MR-1X081RU-6 UCS-MR-1X081RU-6 16GB SP232095 DDR4 RDIMM (ECC Registered) 288 Pin DIMM PHS-memory® UCS-MR-1X162RU-6 32GB SP232096 DDR4 RDIMM (ECC Registered) 288 Pin DIMM PHS-memory® UCS-MR-1X322RU-6 64GB SP465912 DDR4 RDIMM (ECC Registered) 288 Pin DIMM PHS-memory® PHS-memory® UCS-ML-1X644RU-6 64GB SP232094 DDR4 LRDIMM (ECC LR DIMM) 288 Pin DIMM PHS-memory® UCS-ML-1X644RU-6 64GB SP232094 DDR4 LRDIMM (ECC LR DIMM) 288 Pin DIMM PHS-memory® UCS-ML-1X644RU-6 64GB SP232094 DDR4 LRDIMM (ECC LR DIMM) 288 Pin DIMM PHS-memory® PHS-memory® UCS-ML-1X644RU-6
Registered) MR-1X162RU-C 32GB SP232096 DDR4 RDIMM (ECC Registered) 288 Pin DIMM PHS-memory® UCS-MR-1X322RU-C 64GB SP465912 DDR4 RDIMM (ECC Registered) 288 Pin DIMM PHS-memory® UCS-ML-1X644RU-C 64GB SP232094 DDR4 LRDIMM (ECC LR DIMM) 288 Pin DIMM PHS-memory® UCS-ML-1X644RU-C UCS-ML-1X644RV-AUCS-ML-X64G4RT-H, UCS-ML-X64G4RS UCS-ML-X64G4RS UCS-ML-X64G4RS UCS-ML-X64G4RS
Registered) MR-1X322RU-C UCS- MR-1X644RU-C UCS-
Registered) 64GB SP232094 DDR4 LRDIMM (ECC 288 Pin DIMM PHS-memory® UCS-LR DIMM) LR DIMM) ML-1X644RU-CUCS-ML-1X644RV-AUCS-ML-X64G4RT-H, UCS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G4RS-ML-X64G8-ML-X64G8-ML-X64G8-ML-X64G8-ML-X64G8-ML-X64G8-ML-X64G8-ML-X64G8-ML-X64G8-ML-X64G8-ML-X64G8-ML-X64G8-ML-X64G8-ML-X
LR DIMM) ML-1X644RU-C UCS- ML-1X644RV-A UCS-ML- X64G4RT-H, UC S-ML-X64G4RS
128GB SP465914 DDR4 RDIMM (ECC 288 Pin DIMM PHS-memory® Registered) 3DS
128GB SP465911 DDR4 LRDIMM (ECC 288 Pin DIMM PHS-memory® LR DIMM)

PHS-memory® warranty

Every PHS-memory® is equipped with a 5-years-warranty of perfect operation. If the RAM module is defective or fails within 5 years of purchase when used properly, you will receive an appropriate RAM module free of charge. If a suitable memory module is no longer available, we will refund the purchase price.

For more information on warranty and service please visit https://www.phs-memory.fr/-W5Y



Contact Information

PHS-electronic gmbh - www.phs-memory.fr -Karl-Götz-Str. 5 97424 Schweinfurt Allemagne Phone: +49 9721 784678 E-Mail: info@phs-memory.fr Web: www.phs-memory.fr

Product Datasheet | SP465914 128GB Computer memory for UCS C460 M4 Xeon E7-x800 V4



All information without guarantee. Technical changes and errors excepted. You can find current price information in our online shop at https://www.phs-memory.fr