
# phs memory®

# 16GB Computer memory DDR4 for Supermicro SuperServer 1028U-TNRT+ RDIMM



## PHS-memory® - computer memory with 100% quality

- many years of IT competence
- Free support for optimal configuration and product selection
- High availability through professional warehouse management
- Fast delivery in throughout Europe
- Short response times and professional order processing due to full digitalization throughout the entire process with complete traceability
- Incoming goods inspection include checks of the DRAMs, PCBs and the programmed SPDs in order to exclude possible errors (Controlled BOM).
- PHS-memory® brand memories guarantee 100% compatibility to the specified system.
- PHS-memory® memories can be used together with existing memories in the device depends on to the configuration rules of the system.
- The "fallback option" in the SPD of PHS-memory® allows DRAMs with higher clock rates to be operated together with older memory modules with lower clock rates within the system.
- Products with unique serial number for service and warranty
- Pre-sales and after-sales support by technically trained personnel

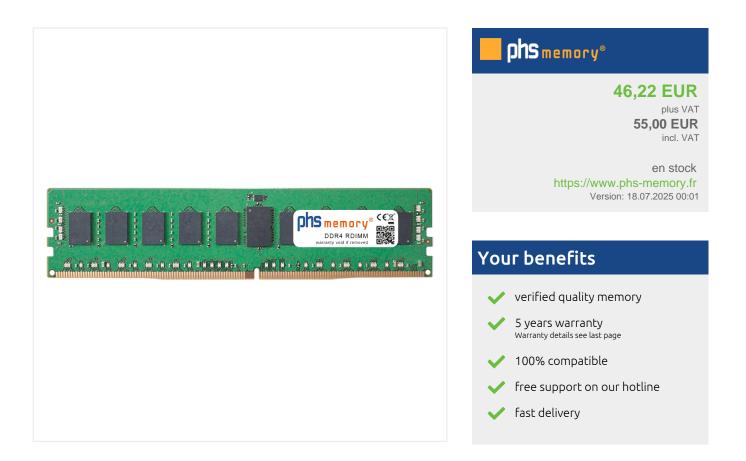

## Memory Specification



| 16GB                    |
|-------------------------|
| DDR4                    |
| yes                     |
| PC4-2400T-R             |
| RDIMM (ECC Registered)  |
| 288 Pin DIMM            |
| 2400MHz @ CL17          |
| 1,2 Volt                |
| -                       |
| 133,35 x 31,25 (LxB mm) |
| 0° C - 85° C            |
| -40° C - +95° C         |
| yes                     |
| SP253720                |
| 4063369219298           |
|                         |

Note: The module specified in this datasheet is one of several possible configurations available under this part number.

Some details may differ from the specifications described here and the illustration, but have no negative influence on the functionality.



## System Specifications

The memory is 100% compatible with this sytem:

| System manufacturer      | Supermicro                            |
|--------------------------|---------------------------------------|
| Device type              | Server                                |
| Device family            | SuperServer                           |
| Device series            | 1028 Serie                            |
| Device name              | SuperServer 1028U-TNRT+               |
| Maximum memory*          | 3TB / 1,5TB according to manufacturer |
| Number of memory sockets | 24                                    |

\* The specifications for the maximum memory upgrade may differ from those of the manufacturer Supermicro. Often the information given in the manual for the maximum memory upgrade is not up to date. New memory technologies, bios updates or newer software versions often allow the use of memory modules with a higher capacity than specified by the manufacturer with the same performance and stability.

## Information on memory allocation

#### Information on memory configuration

The following technical specifications should be considered in advance:

- The system supports RDIMM and RDIMM 3DS (Registered DIMM) or LRDIMM and LRDIMM 3DS (Load Reduced DIMM) memory modules. Large memory capacities can be realised with LRDIMM 3DS modules.
- RDIMM and RDIMM 3DS memory modules cannot be operated together with LRDIMM and LRDIMM 3DS main memories.
- If a memory expansion is to be made with the already existing RAM memories, it must be checked which basic memory technology (RDIMM / LRDIMM) is available.
- Memory slots without a processor may not be used.
- A higher memory clock of the memory module automatically adapts to the memory clock specified by the system. This can be the case especially with larger capacities.

## Information on memory installation

- Turn off the system
- Remove the plug of the power supply unit (if connected)
- Remove the battery, according to the user manual of the system
- Always ground yourself before touching electronic components
- Protect the memory module from static voltages:
- Do not touch the gold pins of the memory module
- Only touch the sides of the memory module
- Use a grounding strap and/or ESD glove if possible

General installation instructions are supplied by E-Mail.



## Further memory options for Supermicro SuperServer 1028U-TNRT+

| Size  | SKU      | Technology | Туре                          | Number of pins | Brand       | Reference no. |
|-------|----------|------------|-------------------------------|----------------|-------------|---------------|
| 8GB   | SP253722 | DDR4       | RDIMM (ECC<br>Registered)     | 288 Pin DIMM   | PHS-memory® |               |
| 16GB  | SP253720 | DDR4       | RDIMM (ECC<br>Registered)     | 288 Pin DIMM   | PHS-memory® |               |
| 32GB  | SP253721 | DDR4       | RDIMM (ECC<br>Registered)     | 288 Pin DIMM   | PHS-memory® |               |
| 64GB  | SP466966 | DDR4       | RDIMM (ECC<br>Registered)     | 288 Pin DIMM   | PHS-memory® |               |
| 64GB  | SP253719 | DDR4       | LRDIMM (ECC<br>LR DIMM)       | 288 Pin DIMM   | PHS-memory® |               |
| 128GB | SP253717 | DDR4       | LRDIMM (ECC<br>LR DIMM)       | 288 Pin DIMM   | PHS-memory® |               |
| 128GB | SP473837 | DDR4       | RDIMM (ECC<br>Registered) 3DS | 288 Pin DIMM   | PHS-memory® |               |

#### PHS-memory® warranty

Every PHS-memory® is equipped with a 5-years-warranty of perfect operation. If the RAM module is defective or fails within 5 years of purchase when used properly, you will receive an appropriate RAM module free of charge. If a suitable memory module is no longer available, we will refund the purchase price.

For more information on warranty and service please visit https://www.phs-memory.fr/-W5Y



## Contact Information

PHS-electronic gmbh - www.phs-memory.fr -Karl-Götz-Str. 5 97424 Schweinfurt Allemagne Phone: +49 9721 784678 E-Mail: info@phs-memory.fr Web: www.phs-memory.fr

All information without guarantee. Technical changes and errors excepted. You can find current price information in our online shop at https://www.phs-memory.fr