
phs memory®

32GB Computer memory DDR3 for Supermicro SuperServer F627R3-FTPT+ LRDIMM



PHS-memory® - computer memory with 100% quality

- many years of IT competence
- Free support for optimal configuration and product selection
- High availability through professional warehouse management
- Fast delivery in throughout Europe
- Short response times and professional order processing due to full digitalization throughout the entire process with complete traceability
- Incoming goods inspection include checks of the DRAMs, PCBs and the programmed SPDs in order to exclude possible errors (Controlled BOM).
- PHS-memory® brand memories guarantee 100% compatibility to the specified system.
- PHS-memory® memories can be used together with existing memories in the device depends on to the configuration rules of the system.
- The "fallback option" in the SPD of PHS-memory® allows DRAMs with higher clock rates to be operated together with older memory modules with lower clock rates within the system.
- Products with unique serial number for service and warranty
- Pre-sales and after-sales support by technically trained personnel

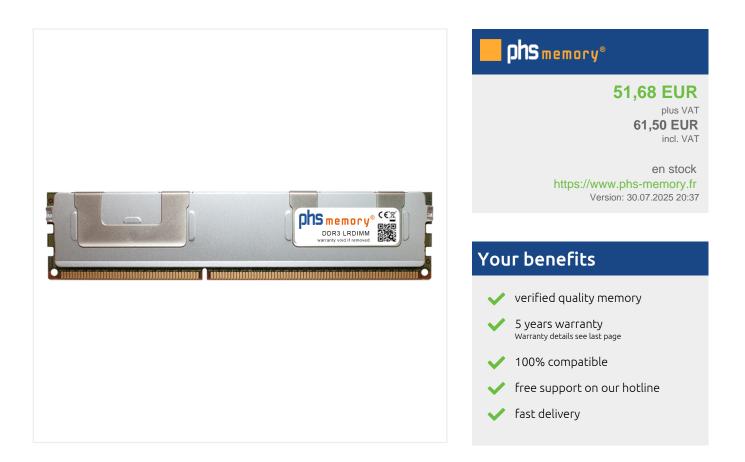

Memory Specification



Memory technologyDDR3ECC supportjaJEDEC NormPC3L-12800LJEDEC Norm2Gx4DRAM Organization2Gx4Rank4Rx4 (4DRx4 DDP)TypeLRDIMM (ECC LR DIMM)Number of pins240 Pin DIMMMemory data transfer rate1600MHz @ CL11Voltage1,35 VoltSpecialityDDPBoard dimensions133,35 x 30 (LxB mm)Operating temperature0° C - 85° C	Memory size	32GB		
JEDEC NormPC3L-12800LDRAM Organization2Gx4Rank4Rx4 (4DRx4 DDP)TypeLRDIMM (ECC LR DIMM)Number of pins240 Pin DIMMMemory data transfer rate1600MHz @ CL11Voltage1,35 VoltSpecialityDDPBoard dimensions133,35 x 30 (LxB mm)	Memory technology	DDR3		
DRAM Organization2Gx4Rank4Rx4 (4DRx4 DDP)TypeLRDIMM (ECC LR DIMM)Number of pins240 Pin DIMMMemory data transfer rate1600MHz @ CL11Voltage1,35 VoltSpecialityDDPBoard dimensions133,35 x 30 (LxB mm)	ECC support	ја		
Rank4Rx4 (4DRx4 DDP)TypeLRDIMM (ECC LR DIMM)Number of pins240 Pin DIMMMemory data transfer rate1600MHz @ CL11Voltage1,35 VoltSpecialityDDPBoard dimensions133,35 x 30 (LxB mm)	JEDEC Norm	PC3L-12800L		
TypeLRDIMM (ECC LR DIMM)Number of pins240 Pin DIMMMemory data transfer rate1600MHz @ CL11Voltage1,35 VoltSpecialityDDPBoard dimensions133,35 x 30 (LxB mm)	DRAM Organization	2Gx4		
Number of pins240 Pin DIMMMemory data transfer rate1600MHz @ CL11Voltage1,35 VoltSpecialityDDPBoard dimensions133,35 x 30 (LxB mm)	Rank	4Rx4 (4DRx4 DDP)		
Memory data transfer rate1600MHz @ CL11Voltage1,35 VoltSpecialityDDPBoard dimensions133,35 x 30 (LxB mm)	Туре	LRDIMM (ECC LR DIMM)		
Voltage1,35 VoltSpecialityDDPBoard dimensions133,35 x 30 (LxB mm)	Number of pins	240 Pin DIMM		
SpecialityDDPBoard dimensions133,35 x 30 (LxB mm)	Memory data transfer rate	1600MHz @ CL11		
Board dimensions 133,35 x 30 (LxB mm)	Voltage	1,35 Volt		
	Speciality	DDP		
Operating temperature 0° C - 85° C	Board dimensions	133,35 x 30 (LxB mm)		
	Operating temperature	0° C - 85° C		
Storage temperature-40° C - +95° C	Storage temperature	-40° C - +95° C		
RoHS compliant Yes	RoHS compliant	Yes		
SKU SP263587	SKU	SP263587		
EAN 4063369319059	EAN	4063369319059		

overRAMing maximize your RAM



Most systems - including the Supermicro SuperServer F627R3-FTPT+ - can be upgraded with more memory than originally specified by the device manufacturer.

Therefore, our memory specialists continuously analyze new memory solutions in selected systems. Due to improved manufacturing technologies, new memories with higher performance and capacity will be tested for stability and functionality.

Then the new memory solutions are released for the respective systems. Use the benefits of larger computer memory capacity with the PHSmemory® overRAMing memory solutions.

https://www.phs-memory.fr/-BOR

Note: The module specified in this datasheet is one of several possible configurations available under this part number.

Some details may differ from the specifications described here and the illustration, but have no negative influence on the functionality.



System Specifications

The memory is 100% compatible with this sytem:

System manufacturer	Supermicro		
Device type	Server		
Device family	SuperServer		
Device series	F627 Serie		
Device name	SuperServer F627R3-FTPT+		
Maximum memory*	512GB ECC / 128GB according to manufacturer		
Number of memory sockets	16		

* The specifications for the maximum memory upgrade may differ from those of the manufacturer Supermicro. Often the information given in the manual for the maximum memory upgrade is not up to date. New memory technologies, bios updates or newer software versions often allow the use of memory modules with a higher capacity than specified by the manufacturer with the same performance and stability.

Memory modules with our overRAMing-symbol are approved by us for maximum memory expansion.

Information on memory allocation

Which memory configuration is possible?

Our memory team will be happy to help you choose the right memory and configure your server.

Technologie	RAM in maximaler capacity		
UDIMM ECC	128GB RAM 2 x (8 x 8GB ECC UDIMM)		
RDIMM 2Rank	256GB RAM 2 x (8 x 16GB RDIMM)		
RDIMM 4Rank	512GB RAM 2 x (8 x 32GB RDIMM)		
LRDIMM	1TB RAM 2 x (8 x 64GB LRDIMM)		

ECC DIMM, Registered DIMM and Load Reduced LRDIMM memory modules must not be mixed. Bei einer Aufrüstung sollten Sie deshalb wissen, welche memory bereits vorhanden sind, or komplett auf RDIMMcomputer memory upgrade.

Principles of memory assembly

- Pro CPU sind 4 memorykanäle vorhanden with jeweils 2 memoryslots
- ECC DIMM, Registered DIMM and Load Reduced LRDIMM memory modules must not be mixed
- memorysteckplätze for die kein Prozessor vorhanden ist dürfen nicht bestückt werden

Memory configuration for good system performance

- Verteilen Sie die memory gleichmäßig auf die memorysteckplätze and gleichmäßig auf die CPUs
- Wenn mehr als eine CPU vorhanden sind, sollten die memory pro CPU identisch (gespiegelt zur anderen CPU) bestückt werden.

Information on memory installation



- Turn off the system
- Remove the plug of the power supply unit (if connected)
- Remove the battery, according to the user manual of the system
- Always ground yourself before touching electronic components
- Protect the memory module from static voltages:
 - Do not touch the gold pins of the memory module
 - Only touch the sides of the memory module
 - Use a grounding strap and/or ESD glove if possible

General installation instructions are supplied by E-Mail.

phs memory®

Further memory options for Supermicro SuperServer F627R3-FTPT+

Size	SKU	Technology	Туре	Number of pins	Brand	Reference no.
4GB	SP263585	DDR3	UDIMM ECC (ECC unbuffered)	240 Pin DIMM	PHS-memory®	
8GB	SP263591	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	
8GB	SP263586	DDR3	UDIMM ECC (ECC unbuffered)	240 Pin DIMM	PHS-memory®	
16GB	SP263588	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	
32GB	SP263589	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	
32GB	SP263587	DDR3	LRDIMM (ECC LR DIMM)	240 Pin DIMM	PHS-memory®	

PHS-memory® warranty

Every PHS-memory® is equipped with a 5-years-warranty of perfect operation. If the RAM module is defective or fails within 5 years of purchase when used properly, you will receive an appropriate RAM module free of charge. If a suitable memory module is no longer available, we will refund the purchase price.

For more information on warranty and service please visit https://www.phs-memory.fr/-W5Y



Contact Information

PHS-electronic gmbh - www.phs-memory.fr -Karl-Götz-Str. 5 97424 Schweinfurt Allemagne Phone: +49 9721 784678 E-Mail: info@phs-memory.fr Web: www.phs-memory.fr

All information without guarantee. Technical changes and errors excepted. You can find current price information in our online shop at https://www.phs-memory.fr